


RLB8-DP Data Sheet

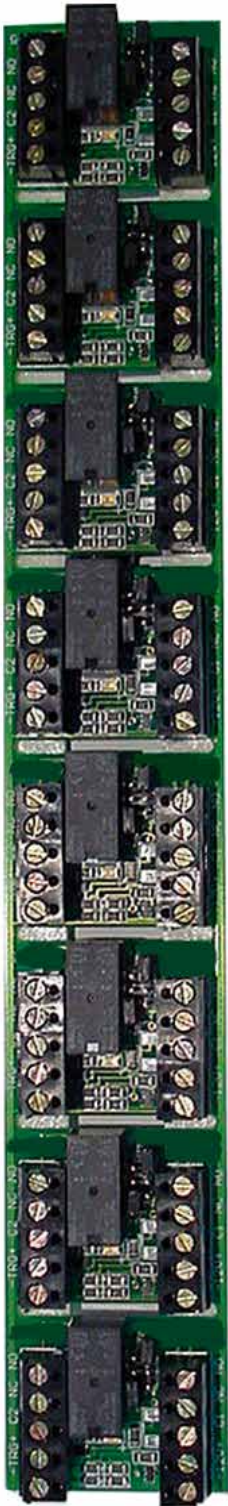


The 12Vdc powered RLB8-DP relay board from Tactical Power Products features a strip of eight (8) individual dual buffered, Double Pole / Double Throw (DPDT) Relays which share a common power rail. (Relays may be separated from the strip for individual or group use.)

Each relay features a transistor buffered input which may be triggered by any positive DC voltage over 5Vdc or by 0Vdc. (Inputs are provided for + or - trigger).


Each relay segment is provided with a common pole link for each relay pole (DPDT=2 Poles) By setting this link, either +ve or -ve may be jumpered to the common of either relay pole.

SPECIFICATIONS:

- Input voltage 12 - 15Vdc
- DPDT relay contacts rated at 1A @ 30Vdc
- Trigger threshold : +5V to 12Vdc or 0V
- Current draw 47 mA when relay is active
- Dimensions: 275L x 42W x 20H mm

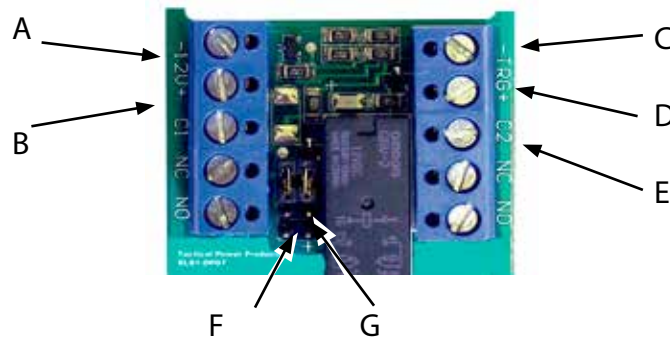

	Description
A	12Vdc Input +/- (must be constantly powered)
B	DP Relay Pole 1 (Com NC NO)
C	-Trigger Input (0V)
D	+Trigger Input (5V to 12Vdc)
E	DP Relay Pole 2 (Com NC NO)
F	Relay Pole 2 Common Link (jumper to + or -)
G	Relay Pole 1 Common Link (Jumper to + or -)



RLB8-DP 12Vdc DPDT Relay Board



AUSTRALIA'S PREMIER SECURITY POWER SPECIALIST



Designed & Manufactured
in Australia

OTHER QUALITY PRODUCTS FROM TACTICAL POWER



TPS13-10DC

13.5Vdc 10A Power Supply and Charger



TPS13-5DC

13.5Vdc 5A Power Supply and Charger

© 2016 The contents of this manual are copyright and may not be reproduced without permission of - Tactical Power Products Pty Limited.



TIM-01

Universal Digital Timer 1 Sec to 99 Days



PDM5

10 Way Power Distribution Board

visit www.tacpower.com.au or ask your Tactical distributor for details