

Tactical Power Products - Australia's
Security Power Specialist

High Quality Security Products
Designed, Manufactured and
Supported in Australia

www.tacpower.com.au

U23/9-12 Lambridge Pl. Penrith NSW 2750
Tel: 1300822769 sales@tacpower.com.au



General



RLB1-SPDT is a 12Vdc "buffered" relay with a single pole double throw output (SPDT). Solid state "buffering" of trigger inputs allows RLB1-SPDT to be connected to equipment with limited current sink ability, enabling control of devices drawing up to 6A.

A constant 12Vdc supply must be connected to the terminals marked E & F in Table 1.

The relay may be triggered with a negative or positive voltage applied to terminals G or H (respectively).

RLB1-SPDT is also available as a strip of 8 for multiple output applications (such as lift control) - 12Vdc need only be connected to the first relay in the strip as they are connected on a common bus - order Tactical Part No: RLB8.

Please visit www.tacpower.com.au for additional models.

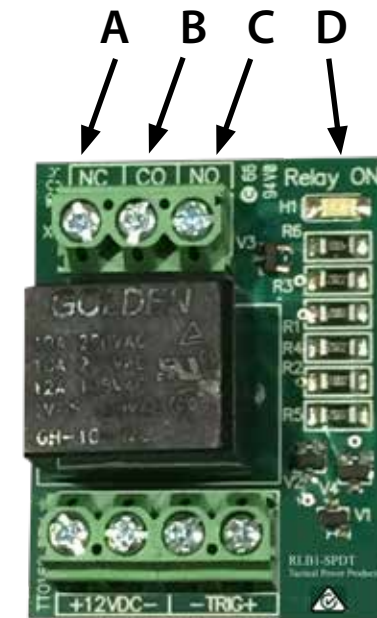


TACTICAL
POWER PRODUCTS

12Vdc DPDT Buffered Relay

RLB1-SPDT

Input Voltage	12Vdc (11 - 15Vdc)
Configuration	SPDT
Contact Rating	6A @ 30Vdc
Dimensions	30W x 40L x 20H mm

Table 1.	
A	Relay Output - Normally Closed
B	Relay Output - Common
C	Relay Output - Normally Open
D	Operation LED
E	12V Input (+ Positive)
F	12V Input (- Negative)
G	Trigger Input (- Negative)
H	Trigger Input (+ Positive)



TPS24-6DC

24Vdc 6A Power Supply with Battery Charger



TPS13-5DC

13.5VDC 5A Power Supply with Battery Charger



TIM-01

Universal Digital Timer 1 Sec to 99 Days



© 2022 The contents of this manual are copyright and may not be reproduced without permission of - Tactical Power Products Pty Limited.



PDM5

10 Way Power Distribution Board with fault relay

www.tacpower.com.au or ask your Tactical distributor for details